

AC 55

Cummins
Mecc Alte
P 602



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z) \$' z' \$z 'D:

	"	kw	"	kw	Amp
400/230	55,00	44,00	50,00	40,00	72,00

fPQDE' ... GC ;) &

fDF DE' ... GC " \$(**

z&(... GC

Standard Specifications

z

fl ! E

z

z

1

ALTERNATOR

fl

fl " E

fPQ \$\$# \$\$\$' E

fl " ! " \$ E

TRANSFER SWITCH

!

AC 55

Cummins
Mecc Alte
P 602

1

Manufacturer		Cummins		
Model		S3,8-G6		
		% \$ \$' "# "		
		53,70 kw [71,90HP]		
	L	3,800		
	"	97 x 128		
		17,5:1		
	fl # 7	"# "	1500	
	fl 7	L	11,00	
		L	14,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	3,60		
	' # "	82,00		
	' # "	4,20		
	° C	546,00		
		12 V d.c.		
	Load	% \$ \$i	'+)) \$i
	# "	12,80	9,50	6,50

2

		Mecc Alte		
		ECO 32-1L/4		
	Hz	50		
	"	50,00		
7cg'		0,80		
		3		
	fl 7	400/230		
Temperature		H		

3

		fl 7		fl 7	
	"	"	"	"	L
AC 55	870,00	1780,00	950,00	1198,00	105,00
	"	fl 7		fl 7	
	"	"	"	"	L
AK 30	1140	2470	1010	1461	100

AC 55

Cummins
Mecc Alte
P 602

9B: #9
9b[]bY'gdYYX"
C]'dfYggi fY"
7cc'UbhY'a dYfUhi fY"
F i b' hja Y"
6UHYfmj c'rg"
7cbZ[i fUV'Y hja]b["
; 9B9F 5HCF
J c' hU[Y f@ @B' "
7i ffYbhf@&! @ ' "
: fYei YbVW"
A 5-BG
J c' hU[Y f@ @B' "
: fYei YbVW"
A U]bg'fYUXn"
A U]bg'YbUV'YX"
; Yb"GYhfYUXn"
; Yb"GYhYbUV'YX"

K 5F B-B:
7\Uf[Y Z]i fY"
6UHYfm@ck #:[\] c' hU[Y"
: U] 'hc' ghcd"
@ck #:[\] [YbYfUhc'f j c' hU[Y"
I bXYf#j Yf[YbYfUhc'f ZYei YbVW"
Cj Yf# bXYf'gdYYX"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
G<I H8CK BG
: U] 'hc' ghUf"
9a Yf[YbVW'ghcd"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
Cj Yf# bXYf'gdYYX"
I bXYf#j Yf[YbYfUhc'f ZYei YbVW"
I bXYf#j Yf[YbYfUhc'f j c' hU[Y"
C]'dfYggi fY'gYbgcf'cdYb"
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"
9@97 HF =75@HF -D
: YbYfUhc'f j YfW ffYbh"


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k]h' h'Ya dYfUhi fYz
dfYggi fYz dYfVW'bhU[Y f'k Ufb]b[#]i h'Xck b# 'YVW'VW' h'f'dL
@c'WV'gYh]b['dUfUa YHfg'UbX'a cb]h'f]b['Zca 'D7 'hc
V'c'bfcc' a cXi 'Y'k]h' I G6 V'c'bbYVW'cb'fa Ul '* 'a H'

9'YVW'VW' 'GUZYhm#9A 7 'V'a dUfV']hm6G'9B '* \$-) \$
9'YVW'VW' 'Vi g]bYgg' 'Yei]da Ybh'
6G'9B '*%\$!*&9A 7 'ja a i b]mighUbXUfX"
6G'9B '*%\$!*('9A 7 'Ya]gg]cb'ghUbXUfX

'6UHYfmVUf[Yf]g'a Ubi ZVW' fYX'k]h' 'gk]h'W]b[!a cXY'UbX'GA 8 'YVW'bc'c[mUbX'ih\Ug\] [\ YZ]VW'VW' 6UHYfmVUf[Yf
a cXY'gfci hdi hJ !=VUfUW'f]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g'] 'Ua dYfz% z'] 'Zcf'%&j' c'hUbX'&+Z'] 'Zcf'&' (' "
#bdi h% , ' !&* (' j c'h57 "' Dfc]'bY '&(\$) \Ug'Z 'mici hdi hg\chV'VW]hdfchVW]cb'UbX'ihVWb'VY i gYX'Ug'U'W'ffYbhgci fVW"
Dfc]'bY '%&\$) #&(\$) VUf[Yf'\Ug'\] [\ YZ]VW'VW'cb[']Z'Z' 'ck ZU]i fY'fUfYz'] [\ hk Y] [\ hUbX' 'ck \ 'YUhfUX]UfYX']b
U'V'c'fXUbW'k]h' ']bYUf'U'fYfbU]h'j Yg' H\Y'VUf[Yf]g'Z'hYX'k]h' U'dfchVW]cb'X]cXY'U'V'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[Y'Z]
fY'UmV'c'] VYhk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei]ddYX'k]h' F: =Z]h'f'hc' fYXi V'Y'VW'VW'bc]gY'fUX]UfYX
Zca 'h'Y'XYj]VW'; Uj Ub]W' m]gc'UfYX']bdi hUbX'ci hdi h]m]VW'm(_J 'Zcf'\] [\ 'fY']UV']h'f

AC 55

Cummins
Mecc Alte
P 602

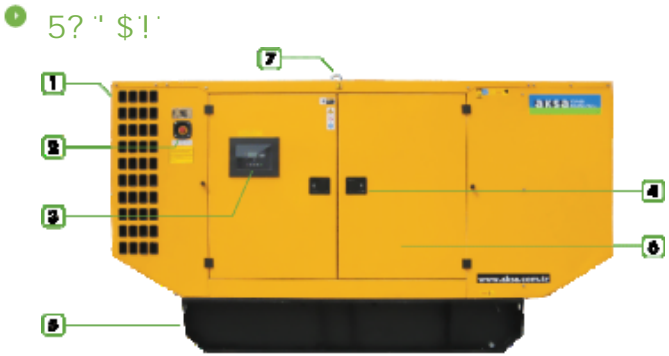

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Base frame -fuel tank.
- 6 Lockable, large doors on each side.
- 7 Lifting Points

	"	1010
fl "L	"	2470
fl "L	"	1461
	L	100